Cables

# OPTIC Cable Assembly

2 DLC Optic Jumper

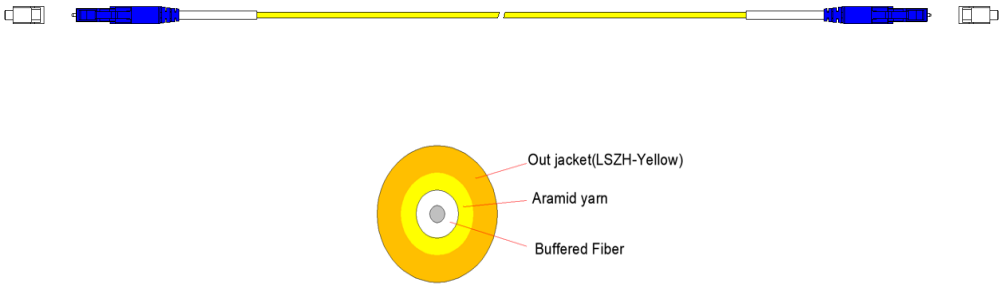


## Specification

- Indoor cable network, Horizontal cabling inside building, Ethernet, FDDI LAN
- Light weight, Easy to Strip, Low attenuation
- High strength aramid yarn, high tensile strength long term stable transmission
- Pigtail and jumper cord with connector

| Specification | |
|---|---|
| Insert Loss | ≤0.5dB |
| Return Loss | ≥50dB (UPC) |
| Outer Shell Material | Plug: Plastic PEI(Ultem), Cable: LSZH |
| Operating Temperature - | 40℃~+85℃ |
| Durability | 200 cycles |
| Salt spray | N/A |
| Waterproof | N/A |
| Match Cable OD | Φ2.0mm |
| Assembly Environment | RoHS2.0 Complaint |
| Assembly Performance | According to GR-326 Standard |
| | |