

Description

- Bend insensitive single-mode fiber with Tight buffered cable
- Selection design for Compact or Rugged type
- Easy compatible usual fiber optic connector


Application

- Drop cable for use indoor or indoor/outdoor
- For universal Drop or Patch cord
- Applicable FTTH or MDU(multi-dwelling unit)


Features

- Excellent bending characteristic
- Flame retardant
- RoHS compliance
- UL Listed OFNR and OFNP

Cable Cross Section

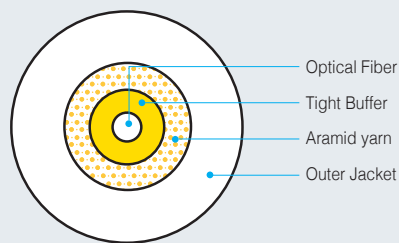

[MDU Compact Drop]

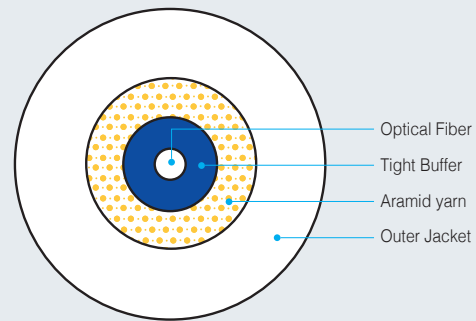

[MDU Rugged Drop]

Standard Cable Information

| Type | Number of Fiber | Tight buffer (μm) | Cable Diameter (mm) | Tensile Load | | Min. Bending Radius | |
|--------------|-----------------|-------------------|---------------------|------------------|---------------|---------------------|-------------|
| | | | | Installation (N) | Operating (N) | Unloaded (mm) | Loaded (mm) |
| Compact Drop | 1C | 900±50 | 2.9 | 220 | 66 | 29 | 58 |
| Rugged Drop | 1C | 900±50 | 4.8 | 440 | 132 | 48 | 96 |

Note. Cable construction and performance available on customer request.

