

Micro Cables



Description

- Available Single-mode or Multi-mode colored fibers
- 2C to 24C Single-unit,
- Range of diameter 1.8mm to 3.0mm


Application

- For Indoor communication system
- Ideal for use in trunk, data center cables
- Small and highly concentrated number of optical fibers
- Suitable for MPO/MTP assembly


Features

- Compact and light weight, Very flexible
- Flame retardant cable
- RoHS compliance
- UL listed OFNR, OFNP

Cable Cross Section

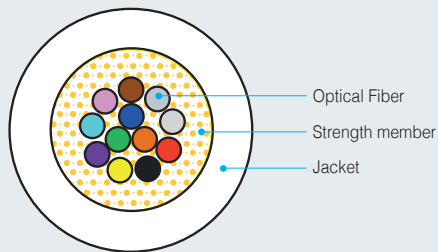

[2C to 12C]

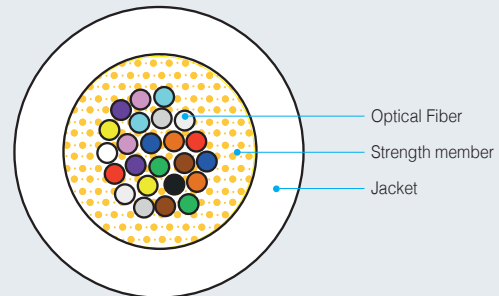

[2C to 24C]

Standard Cable Information

Number of Fiber	Cable Diameter (mm)	Approx. Cable Weight (kg/km)	Min. Bending Radius		Tensile Load	
			Installation (mm)	Static (mm)	Installation (N)	Operation (N)
2C to 12C	1.8 or 2.0	3.5	30	15	100	60
2C to 24C	3.0	8.5	45	23	120	70

Note 1. Cable construction and performance available on customer request.

